


HIGH INTENSITY GRADE REFLECTIVE TAPE

Structure:

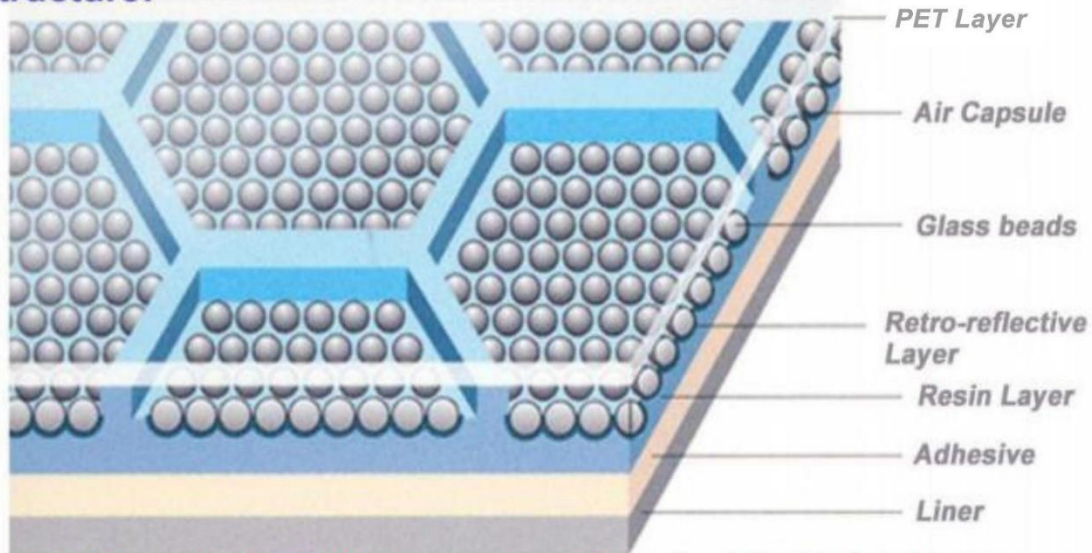

DOT-C2-1(HI) Series Retro-reflective tape of High Intensity Grade is highly reflective, weatherproof, self-adhesive film with excellent resistance of corrosion and solvent. It consists of encapsulated catadioptric glass beads which are embedded in a transparent layer of plastic material. .

Technical data:

1. Surface Film: PET
2. Type of Adhesive: Pressure-Sensitive Type
3. Liner: PE film
4. Thickness of Film: 0.075mm,
Thickness of Glue: 0.05mm,
Thickness of Capsule and Base: 0.06mm,
Total thickness of product: 0.45mm
5. Operating temperature: 20 –28°C
6. Working temperature: -20°C --- 80°C
7. Durability: 1-1.5 years



9.Color Chromaticity(ASTM Requirement of Color-choromaticity):

Standard light source : D65 Observation condition: 45/0 Observation angle: 2 degree.

Color	Color Chromaticity			Luminence Factor
	X	Y	Z	
White	0.3027	0.322	0.601	≥0.27
Red	0.3025	0.321	0.602	0.03...0.10

10.Coefficient of Retro-reflection (Real Testing)

Observation Angle	Entrance Angle	Values Coefficient of Luminous Intensity	
		WHITE	RED
0.2°	-4°	160	60
	30°	160	60
	45°	40	15
0.5°	-4°	78	10
	30°	58	10
	45°	25	5

PT. SANKO MATERIAL INDONESIA

Pabrik lakban, selotip, isolasi & industri pita perekat



Application:

Trucks, trailers, and other vehicles required.



Package:

Standard size: 2 inch*45.72 m/roll

Inner packing: polybag, shrinkable wrap or color box

Outer packing: export carton

Box Dimension: 43cm*22cm*31cm

FACTORY & OFFICE
KAWASAN INDUSTRI JABABEKA 1
JL. JABABEKA XVII H BLOK U 21 J
CIKARANG UTARA, BEKASI, JAWA BARAT
INDONESIA 17530

WAREHOUSE DS3
KAWASAN INDUSTRI DELTA SILICON 3
JL. KAPUK, BLOK F 23 NO. 6 KAV. 2
CIKARANG PUSAT, BEKASI, JAWA BARAT
INDONESIA 17550

CONTACT
TEL: +62 21 8983 3003
FAX: +62 21 8983 3001
Sankolndonesia@gmail.com
Pabriklakban@sankolndonesia.co.id NPWP: 02.198.655.9-431.000

WEBSITE
www.hargalakban.co.id
www.sankolndonesia.com



CERT NO.: 2016-1-0210
ISO 9001 : 2015